


1. TOP PORTION OF SIGN SHALL HAVE A REFLECTIVE BLUE BACKGROUND WITH WHITE REFLECTIVE SYMBOL.
2. BOTTOM PORTION SHALL HAVE A REFLECTIVE WHITE BACKGROUND WITH BLACK OPAQUE LEGEND AND BORDER.
3. SIGN MAY BE FABRICATED ON ONE PANEL OR TWO.
4. SIGNS ARE TO BE MOUNTED AT A HEIGHT OF 7'-0" FROM PAVEMENT TO BOTTOM OF SIGN.

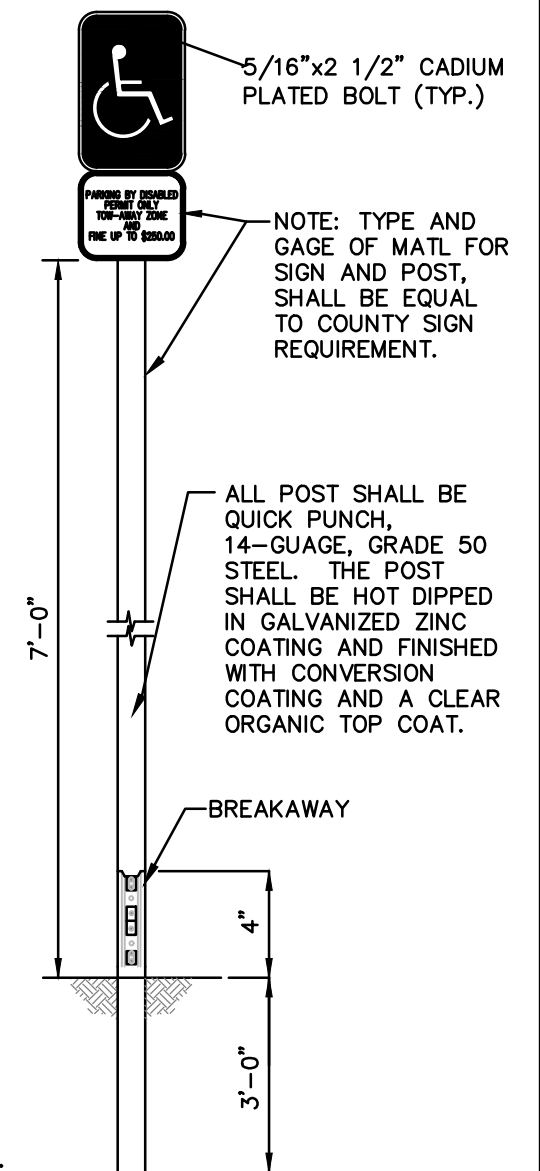

DISABLED ACCESS SIGN